

firemaster FZ

The only AS1530.8.2-2018 Tested BAL-FZ shutter



Revision 4.0 February 2020

delivering engineered solutions

firemaster FZ

The only AS1530.8.2-2018 Tested BAL-FZ shutter

“ANY window/door can achieve BAL-FZ compliance”


how do they work?

The shutter is concealed in a compact head box until it is deployed. This is installed to the exterior of an opening.

The shutter is deployed manually via the push of a button; multiple shutters can be connected to one button. It can also be deployed manually with a hand crank. The shutter can be lowered to any level for additional use as a block-out blind.

available colours

We have 3 base colours (seen below) however can powdercoat to any desired DULUX Duralloy colour.

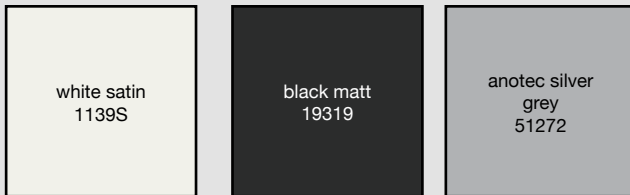

shutter sizes

System	Max Height	Max Width	Headbox Height	Headbox Depth
FireMaster FZ	2600mm	2400mm	200mm	150mm

benefits

- AS3959-2018 Compliant
- Tested to AS1530.8.2-2018
- Seamless design integration
- Bushfire protection up to BAL-FZ
- Concealed in a small compact headbox above your window
- Suitable for all windows and door types
- Designed to span multiple windows or large sized windows
- Manual deployment via crank shaft or button
- Minimum maintenance required
- Simple retrofit solutions
- Can be used as a block-out blind

